

DATE \_\_\_\_\_ PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_ QUANTITY \_\_\_\_\_

# Lumiline Low Profile Driverless Linear LED Luminaire



## FEATURES

- Constant current luminaire
- No driver required
- Multiple mounting options
- 80+ CRI

### FIXTURE COMPONENTS INCLUDED:

L145 fixture, mounting clips.

### FIXTURE COMPONENTS REQUIRED:

32' Leader feed cable

## CONSTRUCTION

- Extruded aluminum housing with satin anodized finish.
- Proprietary optics are UV stable and optimized for transmission

## ELECTRICAL

- 120V AC Only
- luminaires can be wired in series up to 132" length with standard power and 110" with high power.

## ORDERING

PRODUCT	POWER	LENGTH	LED COLOR	OPTICS	CONTROL	MOUNTING	ACCESSORIES
<b>L145</b> LumiLine Low Profile AC Direct LED Luminaire	<b>06</b> 6 watts /linear ft	<b>22</b> 22¼" actual <b>33</b> 33¾" actual <b>44</b> 44¼" actual	<b>W2</b> 2700K White <b>W3</b> 3000K White <b>W35</b> 3500K White <b>W4</b> 4000K White	<b>A</b> Narrow beam <b>60C</b> 60° clear lens <b>60M</b> 60° clear lens (with micro louver for glare control) <b>90F</b> 90°Frosted lens (92% transmittance)	<b>ND</b> Non-Dim <b>F</b> Forward Phase Control Dimming	<b>HV</b> Horizontal & Vertical Mounting Clips (standard, included) <b>S</b> Swivel Mount	<b>BL</b> External Blade Louver

### ADDITIONAL COMPONENTS

SPECIFY QUANTITIES

**LFC-L145-S32** |   
32' Leader feed cable with straight connector

## RATINGS & CERTIFICATION

- cETLus Listed
- Made in the USA
- Average rated LED life of 50,000 hours @ 70% lumen output




## LUMEN OUTPUT

NARROW STANDARD	248 Lm/ft	6 W/ft	42 Lm/w
<b>60° STANDARD</b>	278 Lm/ft	6 W/ft	46 Lm/w
<b>NARROW HIGH</b>	498 Lm/ft	12 W/ft	42 Lm/w
<b>60° HIGH</b>	555 Lm/ft	12 W/ft	46 Lm/w

## WARRANTY 5 Year warranty

visit [electrixillumination.com](http://electrixillumination.com) for details


## PHOTOMETRY

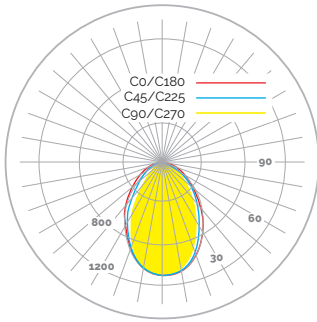

12W 60° with Micro Louvre


IES data available on electrix website [electrixillumination.com](http://electrixillumination.com)

## DIMENSIONS

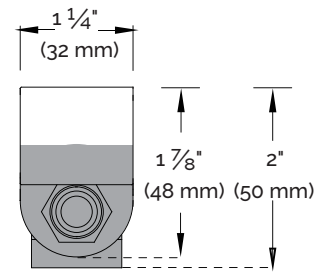


## MOUNTING OPTIONS


### HORIZONTAL

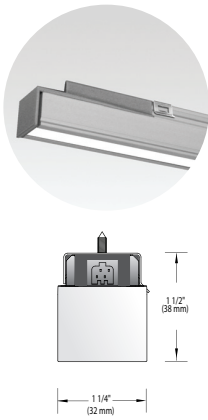


### VERTICAL

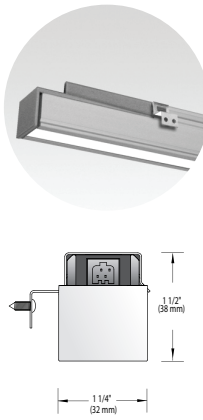

### SWIVEL

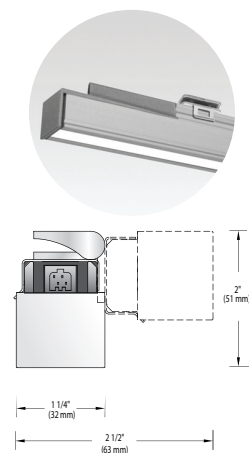

## CABLES AND ACCESSORIES

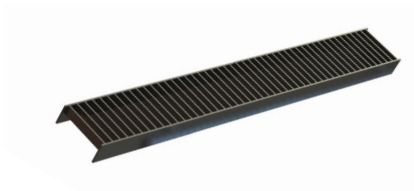

### EXTERNAL BLADE LOUVER

External Blade Louver in Matte Black



### LEADER FEED CABLE (ONE REQUIRED PER LED FEED)

**LFC-L145-S32** 32' primary feed cable with straight connector