


DATE _____ PROJECT _____ TYPE _____ QUANTITY _____

2" Architectural Surface/Suspended Slot Luminaire

for use in offices, corridors, hospitality and lobbies

FEATURES

- 2', 4', 6' & 8' standard — custom lengths available
- Custom power and mounting options for any application
- CRI 90+ Standard
- Universal voltage powered with 120–277V AC
- Individually or Row mounted.
- Corners available
- Damp Location Rated

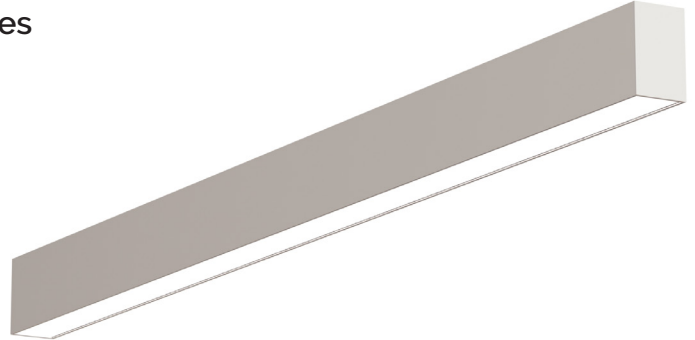

APPLICATIONS Offices, Corridors, Hospitality, Lobbies

FINISH White powder coated standard, custom RAL available

MATERIAL Aluminum Housing, Steel Gear Tray, Acrylic Lens

WARRANTY 5 Year limited warranty

ORDERING

STYLE	LENGTH	INDIRECT LIGHT	DIRECT LIGHT	MOUNT	FINISH	OPTION	CCT/CRI	DIMMING	OPTIC
S2	-	-	-	-	-	-	-	-	S

PRODUCT	LENGTH	INDIRECT LIGHT	DIRECT LIGHT	MOUNT	FINISH
S2 Direct Only Indirect Only Direct&Indirect	2S 2ft Single (individual fixture)	N No Uplight	N No Downlight	S Surface Mount	22 Matte White housing, end plates
	2R 2ft Row mounted (intermediate)	S Standard Output	S Standard Output	X Cable Mount	
	2E 2ft End of row fixture	L Low Output	L Low Output		
	4S 4ft Single (individual fixture)	H High Output	H High Output		02 Semi-gloss White housing, end plates
	4R 4ft Row mounted (intermediate)	E Extra High Output	E Extra High Output		
	4E 4ft End of row fixture	S Standard Output (RGBW)	S Standard Output (RGBW)		
	6S 6ft Single (individual fixture)				08 Semi-gloss Black
	6R 6ft Row mounted (intermediate)	OPTION	CCT/CRI	DIMMING	
	6E 6ft End of row fixture	00 No Option	927 2700K/90+CRI	00 Non-Dimming	
	8S 8ft Single (individual fixture)	0E Emergency Driver (4ft min)	930 3000K/90+CRI	ZX 0-10V Analog dims to 1%	99 Custom Finish (RAL or Computer Matched Color)
	8R 8ft Row mounted (intermediate)	0K Modular Prewired Harness	935 3500K/90+CRI	EL 0-10V controls by others. EldoLED SOLOdrive dims 1%	
	8E 8ft End of row fixture	EK Emergency Driver & Prewired Harness	940 4000K/90+CRI	ED 0-10V controls by others eldoLED SOLOdrive DALI dims 100%-0.1% controls by others	
	CE Corner End		TWH Tunable White	DZ Dual 0-10V for TWH	OPTIC
	CR Corner Row		RGB RGBW	DD DALI controls for TWH	
				DA Arkalumen DMX module for RGBW	
				DM eldoLED LINEARdrive DMX for RGBW	
				S Standard diffusing lens	

RATINGS & CERTIFICATION

- cETLus Listed
- Made in the USA
- Damp Location Rated
- L80>72,000 hours per TM21



LUMEN OUTPUT


STANDARD	645 Lm/ft	75 W/ft
LOW	445 Lm/ft	5 W/ft
HIGH	743 Lm/ft	9 W/ft
EXTRA HIGH	1000 Lm/ft	12 W/ft

Consult factory for custom outputs


visit thelightingquotient.com for details

MOUNTING OPTIONS


2" PENDANT SLOT FIXTURE

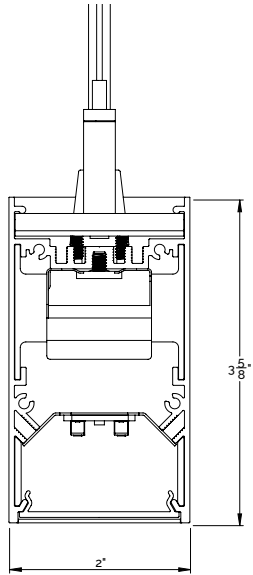


2" SURFACE SLOT

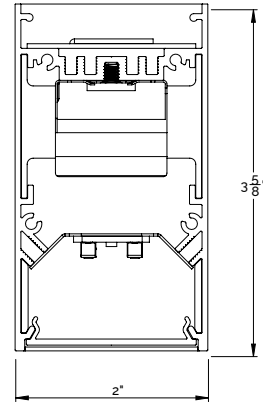

CORNERS

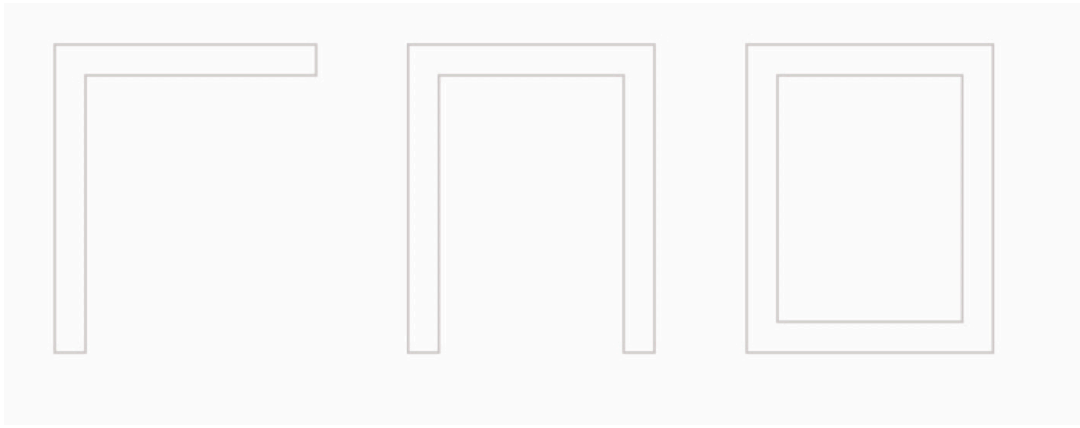

PHOTOMETRY

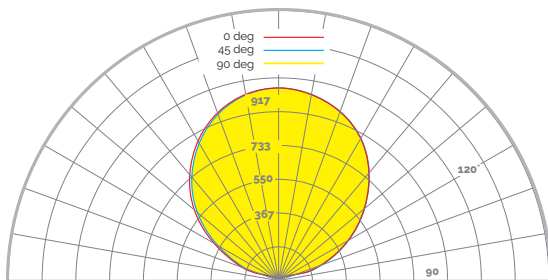

High Power Symmetric

CANDELA

	Center Beam fc	Beam Width	
1.7 ft	357.0	4.9'	4.7'
3.3 ft	94.7	9.4'	9.1'
5 ft	41.3	14.3'	13.8'
6.7 ft	23.0	19.1'	18.5'
8.3 ft	15.0	23.7'	22.9'
10 ft	10.3	28.6'	27.6'

Vertical Spread Horizontal Spread